


AVP 450

Volvo Penta
Mecc Alte
D+ &



| | |
|----------------|-------------|
| ISO8528 | GC,) & |
| SZUTEST | GC - \$\$\$ |
| CE | |

2000/14/EC & \$\$\$#(#
 z) \$ z' z' D:

| | kw | Amp |
|---------|--------|--------|
| 400/230 | 450,00 | 591,80 |
| | 360,00 | |
| | 410,00 | |
| | 328,00 | |

fP GDE GC,) &
 fDF DE % \$! % % & GC " \$ (* z & GC

Standard Specifications

z
 fl ! E
 z
 z

1

ALTERNATOR
 fl
 fl " E
 fl \$\$\$ \$\$\$ E
 fl " \$ E

TRANSFER SWITCH

!

AVP 450

Volvo Penta
Mecc Alte
D+' &'



1

| | | | | |
|--------------------------------------|--------|-------------------------|---------|--------|
| Manufacturer | | Volvo Penta | | |
| Model | | TAD1344GE | | |
| | | % \$ \$ ' "# " | | |
| | | 399,00 kw [543,00HP] | | |
| | L | 12,780 | | |
| | " | 131X158 | | |
| | | 18,1:1 | | |
| | fl # 7 | "# " | 1500 | |
| | fl 7 | L | 36,00 | |
| | | L | 44,00 | |
| AbsorbedAirDischargeReSourceKey.Text | ' # " | 28,00 | | |
| | ' # " | 390,00 | | |
| fl ' # 7 | ' # " | 67,50 | | |
| | ° C | 465,00 | | |
| | | 24 V d.c. | | |
| | Load | % \$ \$ i | ' +) i |) \$ i |
| | # " | 83,10 | 63,30 | 42,80 |

2


| | | | | |
|------|------|------------|--|--|
| | | Mecc Alte | | |
| | | ECO40 2S/4 | | |
| | Hz | 50 | | |
| | " | 450,00 | | |
| 7cg' | | 0,80 | | |
| | | 3 | | |
| | fl 7 | 400/230 | | |
| | A | 649,50 | | |

3

| | | fl 7 | | fl 7 | |
|---------|------|---------|---------|---------|--------|
| | " | " | " | " | L |
| AVP 450 | | 3213,00 | 1550,00 | 1855,00 | 700,00 |
| | | fl 7 | | fl 7 | |
| | " | " | " | " | L |
| MS 70 | 4200 | 4460 | 1606 | 2477 | 700 |

AVP 450

Volvo Penta
Mecc Alte
D+ &

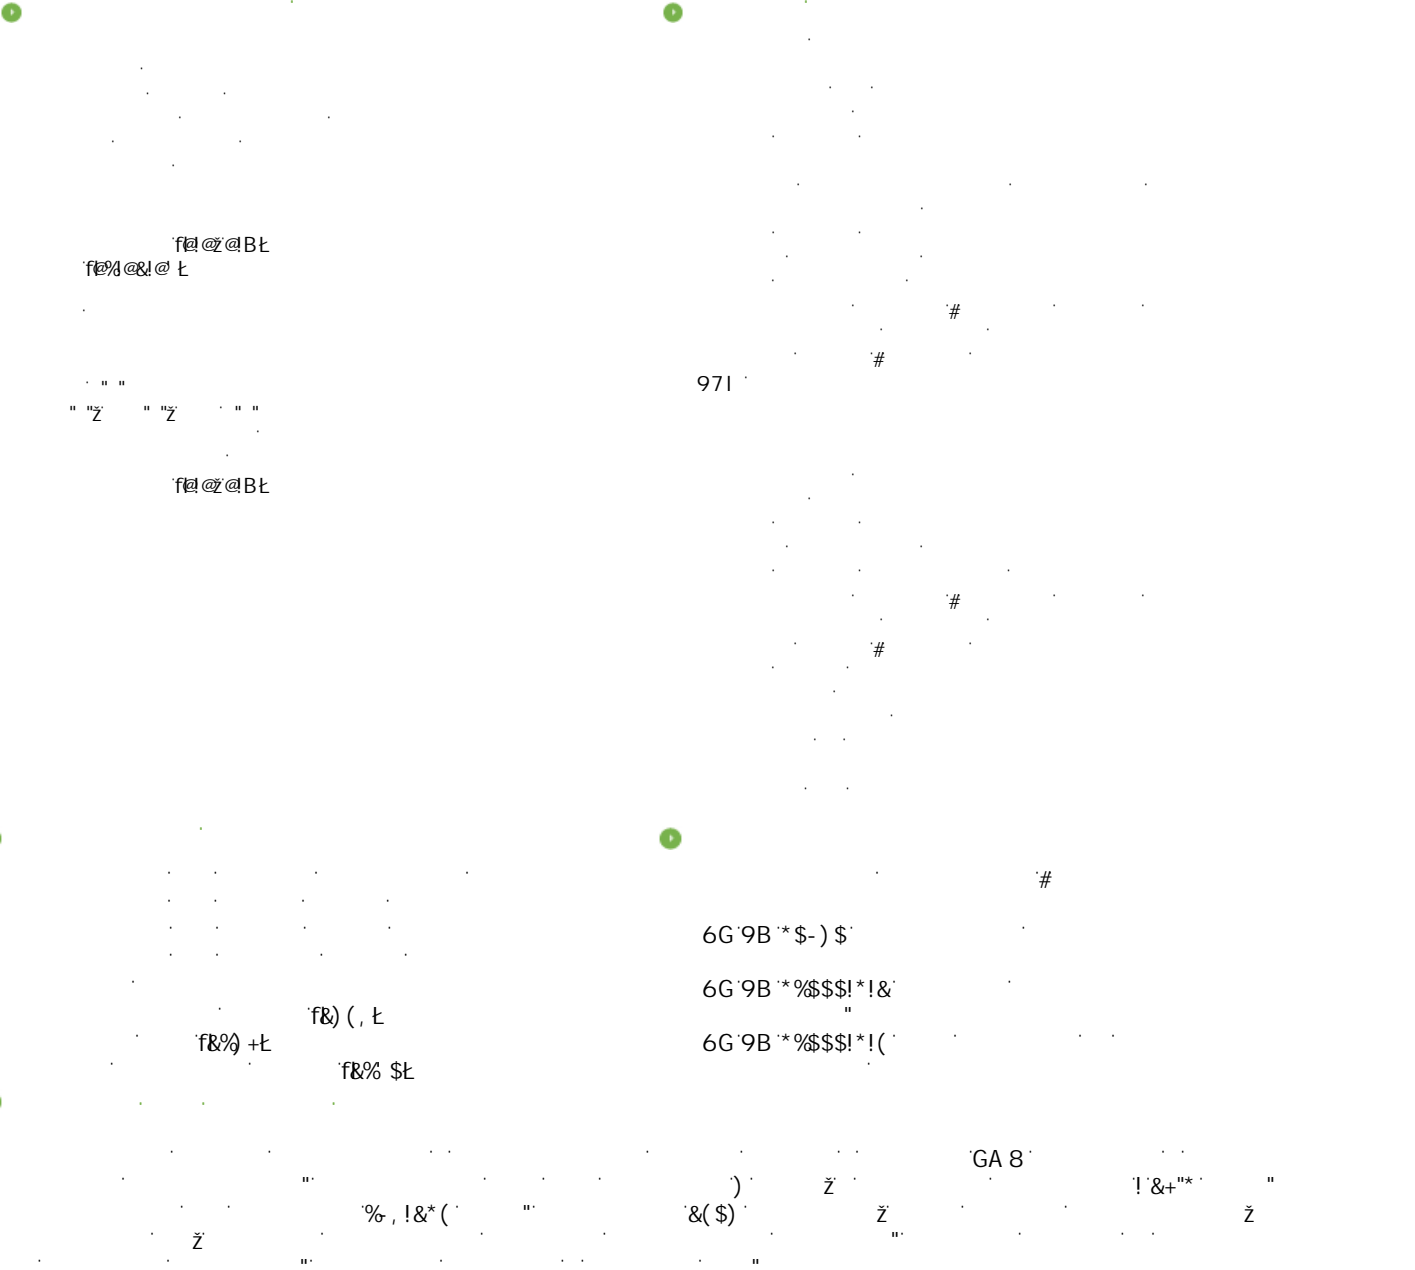

AVP 450

Volvo Penta
Mecc Alte
D+ &



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

| | | |
|-------|---|------|
| | " | 1606 |
| fl "L | " | 4460 |
| fl "L | " | 2477 |
| | L | 700 |